

 FOCUS ON EC FAN ONLY



PBM MOTOR AND FAN(SUZHOU) CO.,LTD




Axial Fan



www.pbmmf.com

EC Axial Fan Ø200x72.5mm

Axial Fans

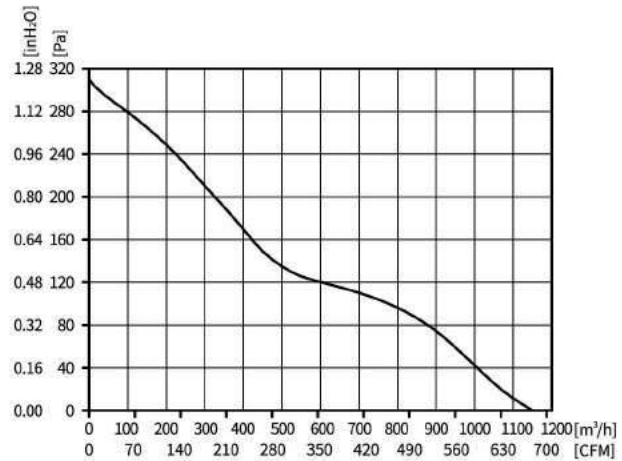


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	1.2KG	E1

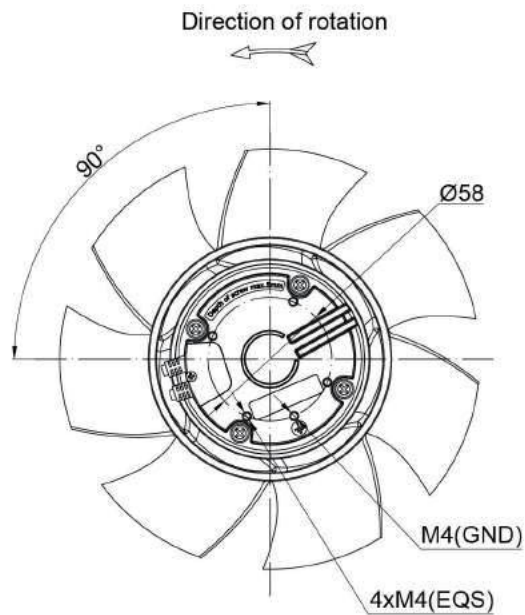
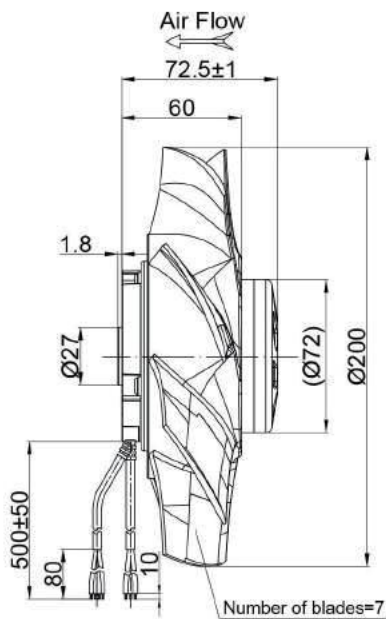


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B2E-RN0	BE72EC	BALL	230	50/60	0.45	58	3000	1150	310	62

EC Axial Fan Ø200x80mm

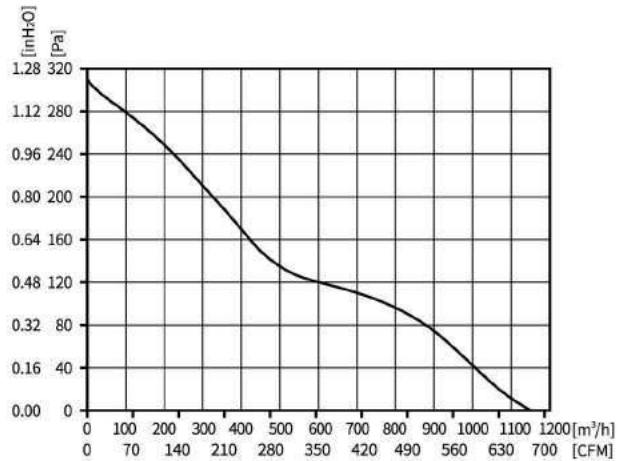


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C ~ +60°C	Weight 1.86KG	Wiring Mode E1
---	------------------------------	-------------------------	-----------------------	--	------------------	-------------------

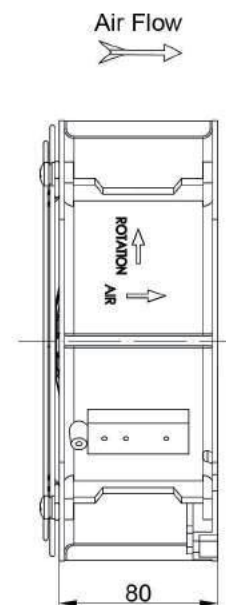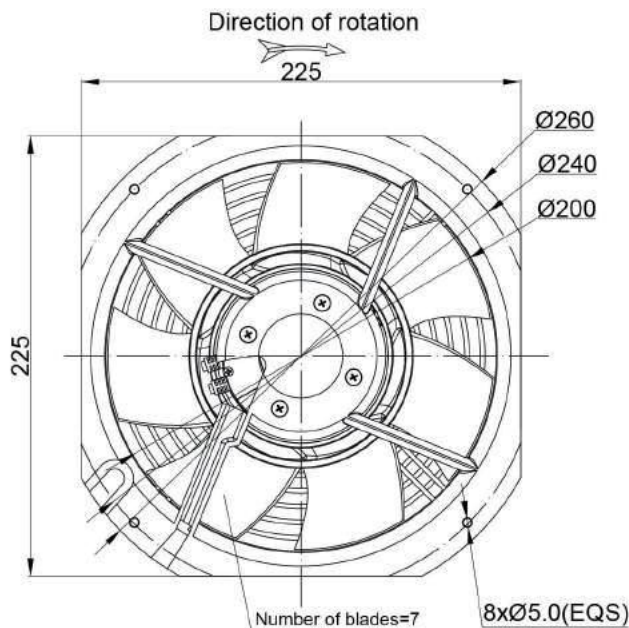



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B2E-RZ0	BE72EC	BALL	230	50/60	0.45	58	3000	1150	310	62

EC Axial Fan Ø200x80.5mm

Axial Fans

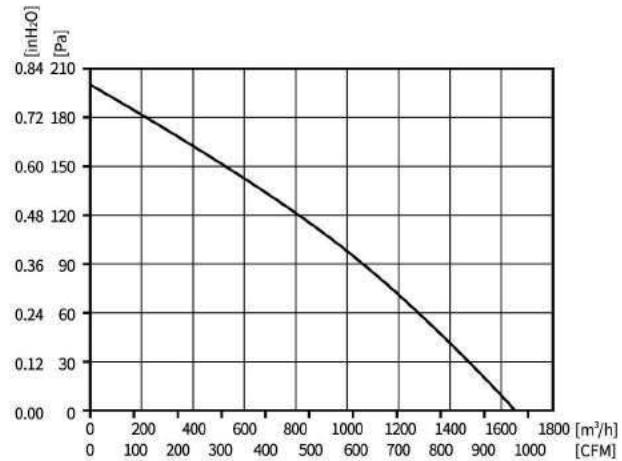


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	1.2KG	E1

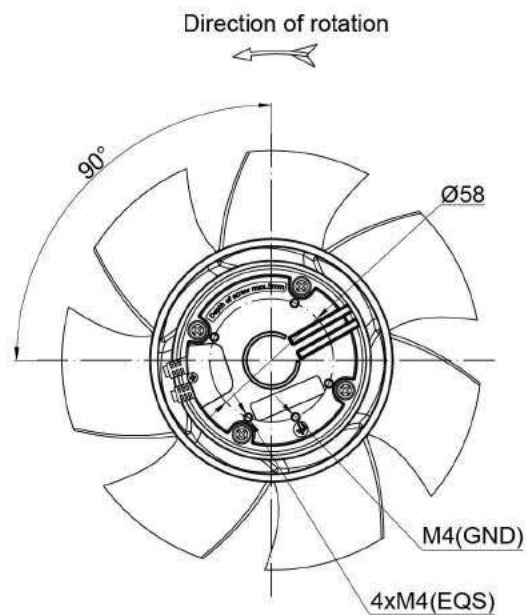
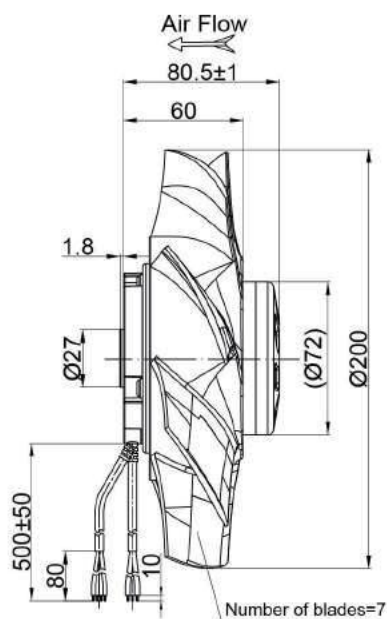


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B2E-SN0	BE72EC	BALL	230	50/60	0.85	115	4100	1650	200	66

EC Axial Fan Ø200x80mm

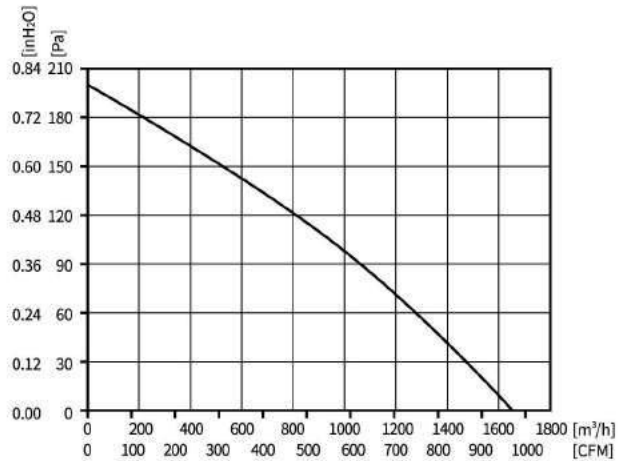


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C~+60°C	Weight 1.86KG	Wiring Mode E1
---	------------------------------	-------------------------	-----------------------	--------------------------------------	------------------	-------------------

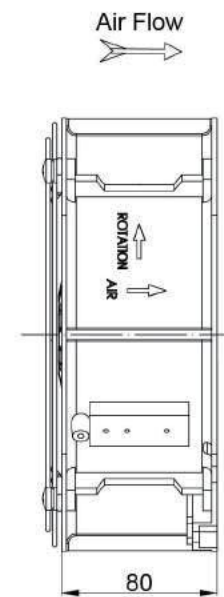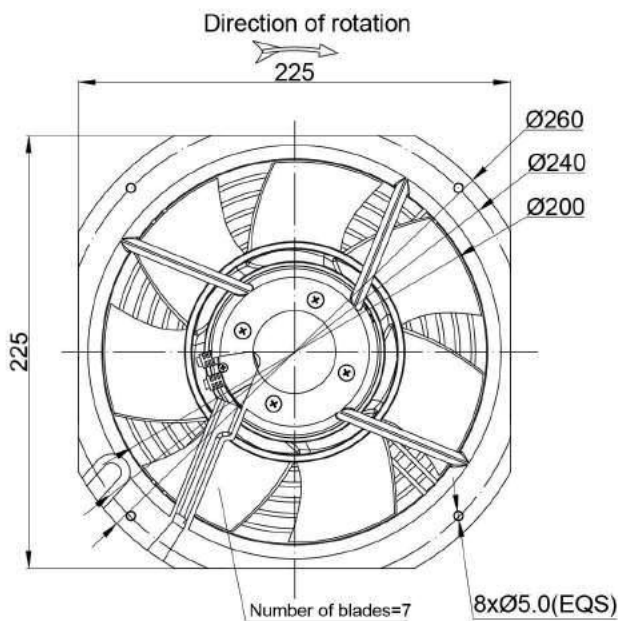



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B2E-SZ0	BE72EC	BALL	230	50/60	0.85	115	4100	1650	200	66

EC Axial Fan Ø250x72.5mm

Axial Fans

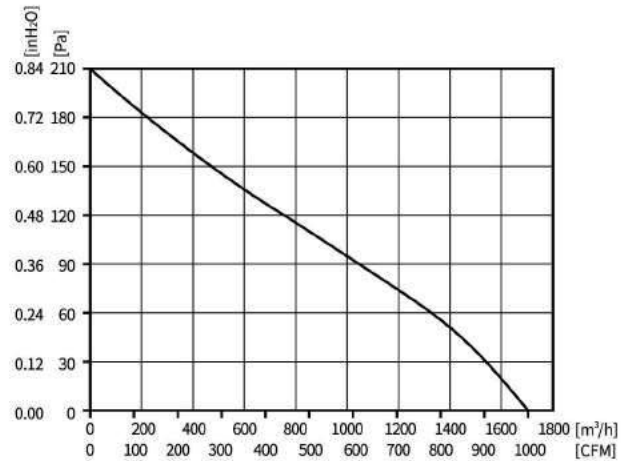


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	1.4KG	E1

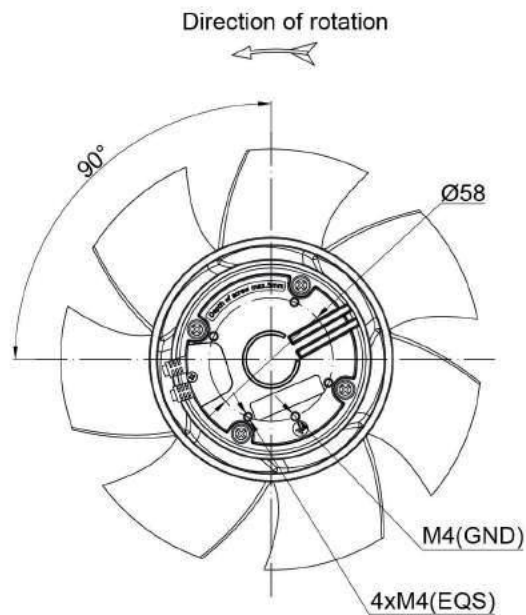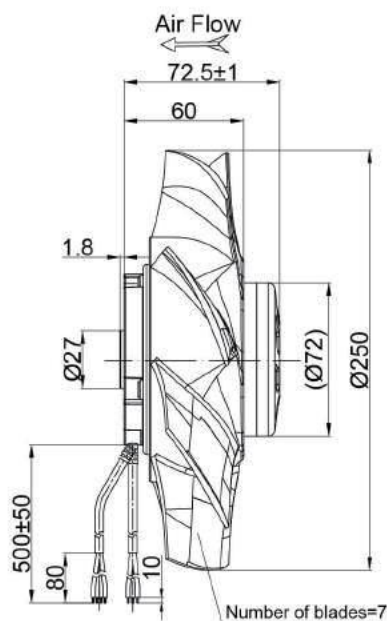


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B2E-RN0	BE72EC	BALL	230	50/60	0.65	85	2600	1700	210	61

EC Axial Fan Ø250x80mm

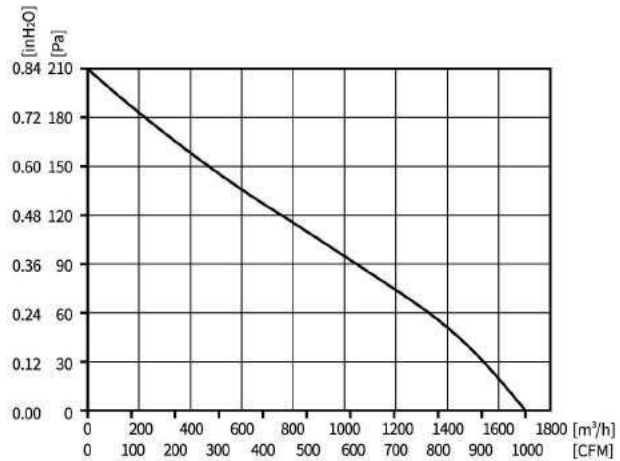


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C ~ +60°C	Weight 2.2KG	Wiring Mode E1
---	------------------------------	-------------------------	-----------------------	--	-----------------	-------------------

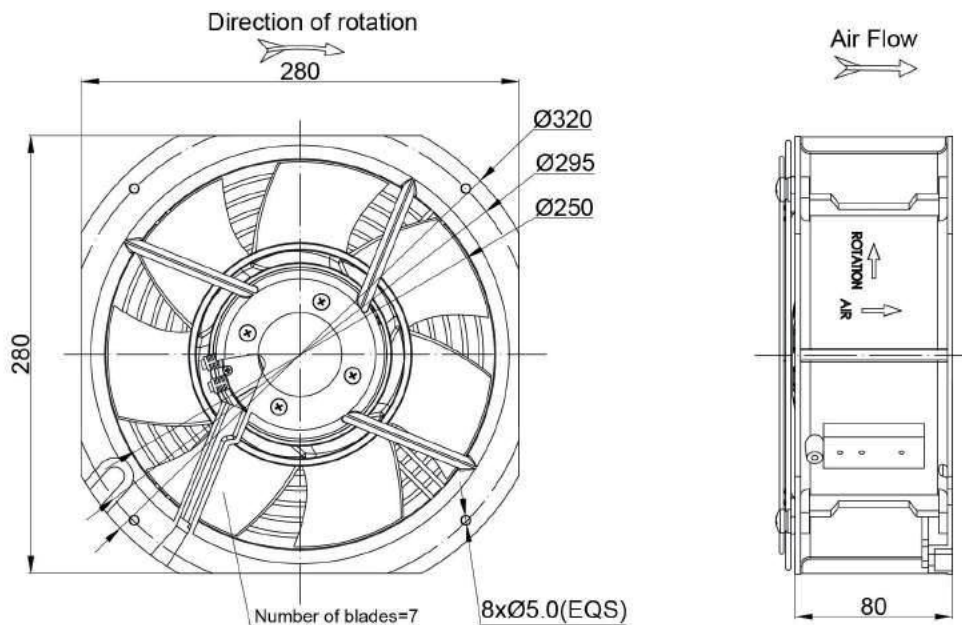



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B2E-RZ0	BE72EC	BALL	230	50/60	0.65	85	2600	1700	210	61

EC Axial Fan Ø250x80.5mm

Axial Fans

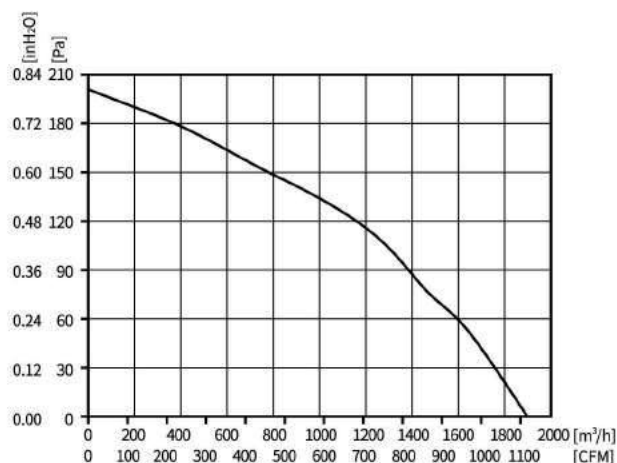


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	1.4KG	E1

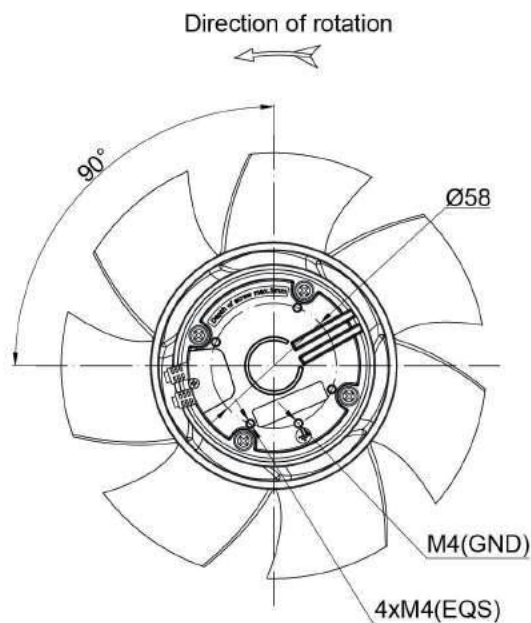
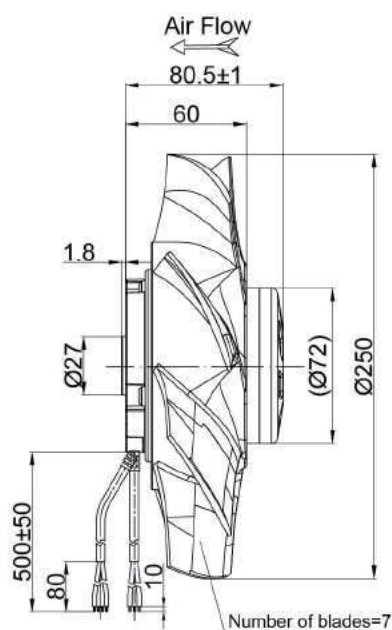


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B2E-SN0	BE72EC	BALL	230	50/60	0.9	120	3000	1900	200	63

EC Axial Fan Ø250x80mm

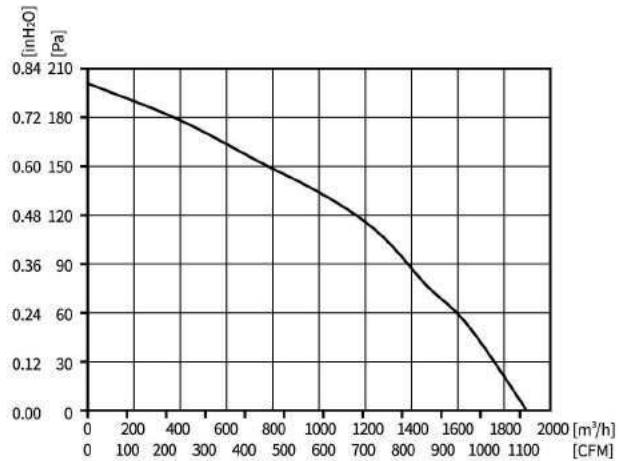


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C ~ +60°C	Weight 2.2KG	Wiring Mode E1
---	------------------------------	-------------------------	-----------------------	--	-----------------	-------------------

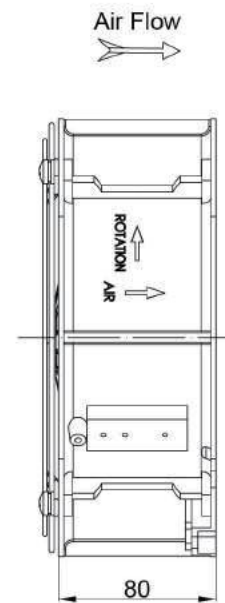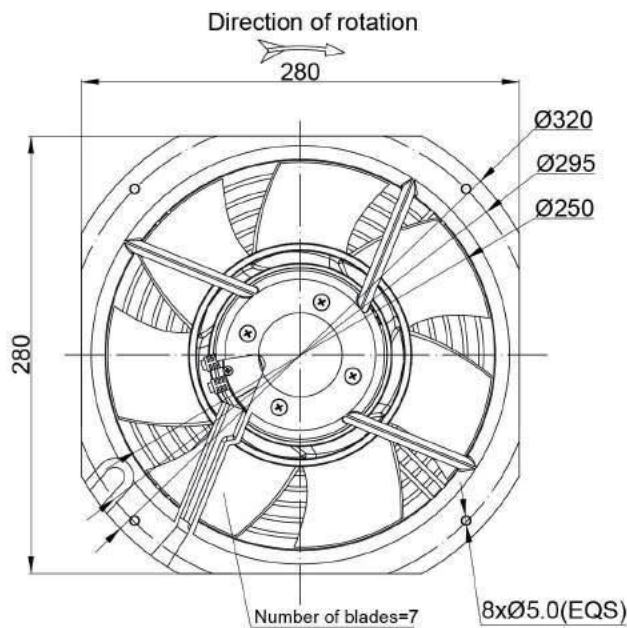



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B2E-SZ0	BE72EC	BALL	230	50/60	0.9	120	3000	1900	200	63

EC Axial Fan Ø300x102mm

Axial Fans

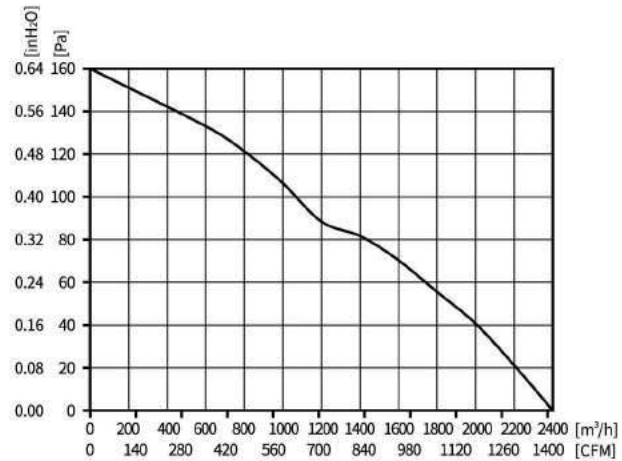


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	2.1KG	E1

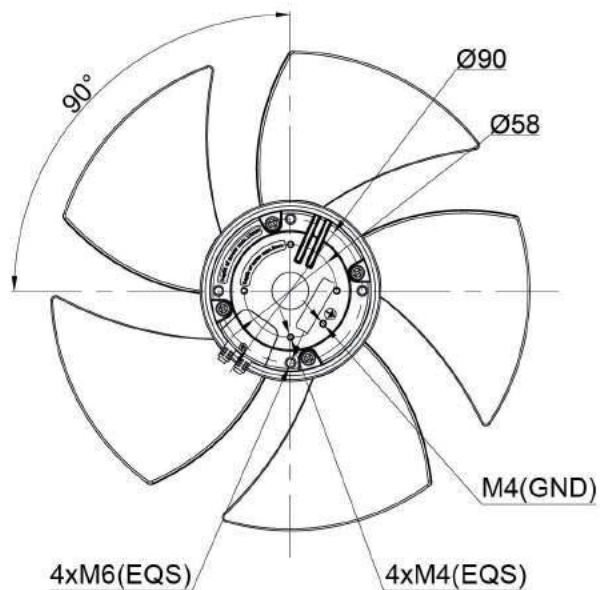
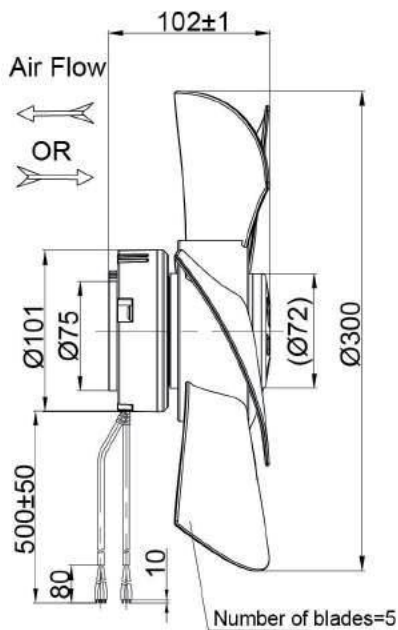


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N300B2E-TN0	BE72EC	BALL	230	50/60	1.1	150	1920	2400	160	66

EC Axial Fan Ø360x106.5mm

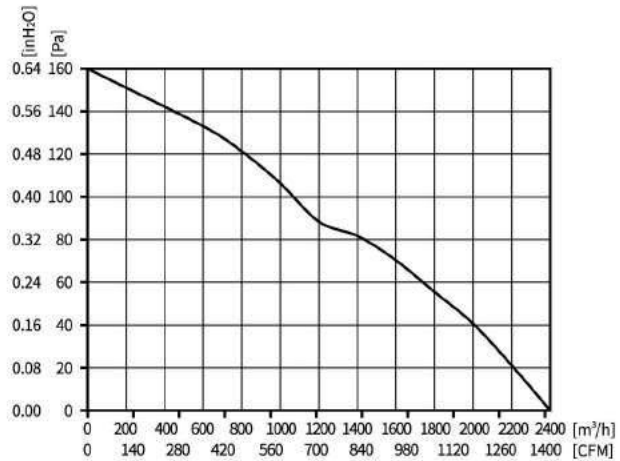


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C~+60°C	Weight 3.2KG	Wiring Mode E1
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

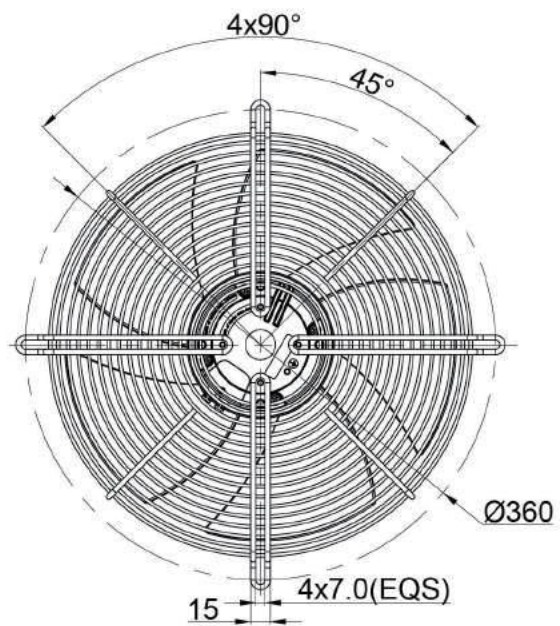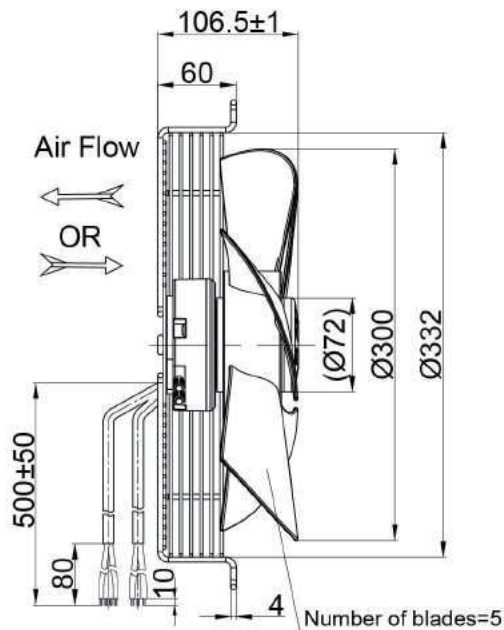



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N300B2E-TZ0	BE72EC	BALL	230	50/60	1.1	150	1920	2400	160	66

EC Axial Fan Ø368x90mm

Axial Fans

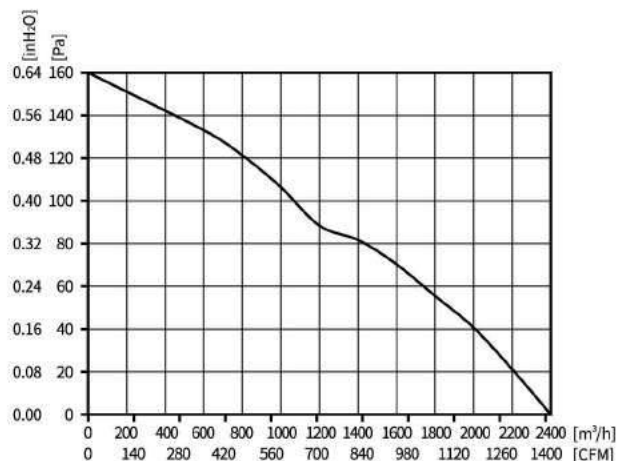


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	3.4KG	E1

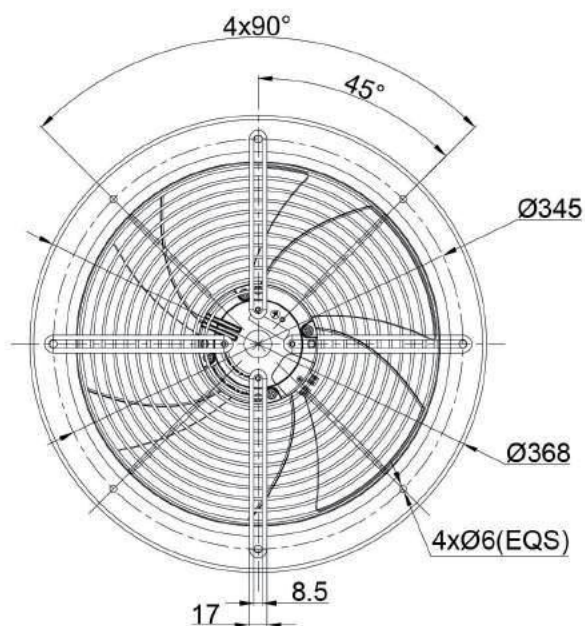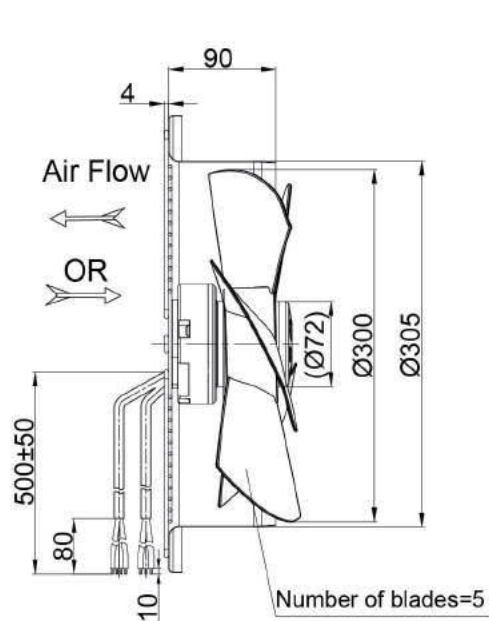



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PW3N300B2E-TZ0	BE72EC	BALL	230	50/60	1.1	150	1920	2400	160	66

EC Axial Fan Ø300x96.5mm

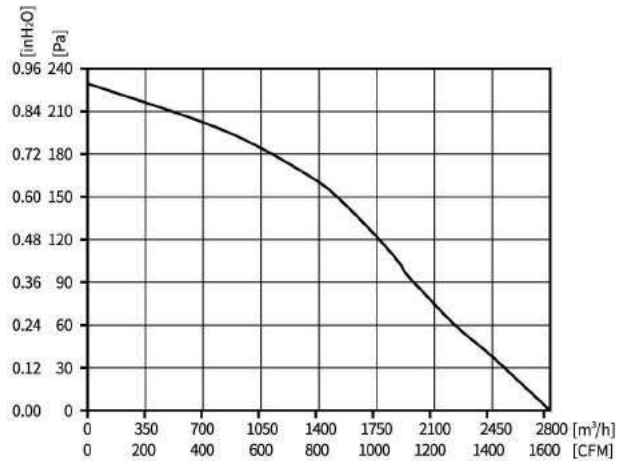

Axial Fans


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C ~ +60°C	Weight 2.8KG	Wiring Mode E2
---	------------------------------	-------------------------	-----------------------	--	-----------------	-------------------

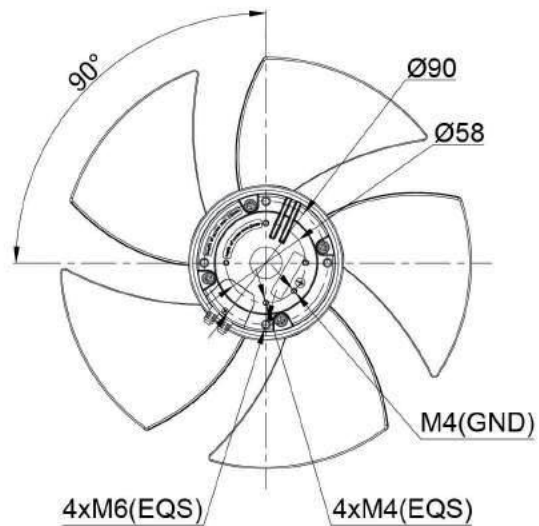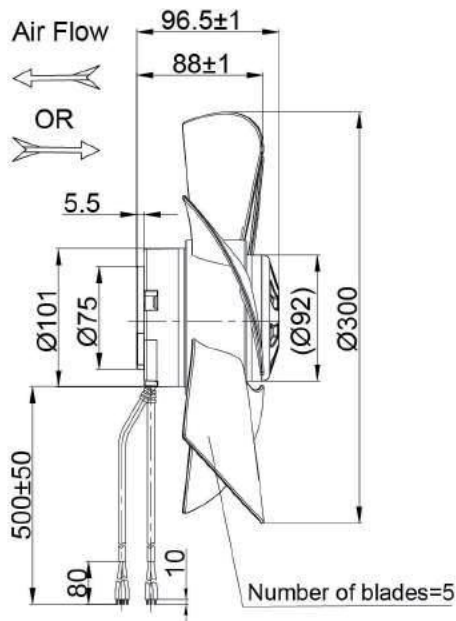



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N300B2E-MN0	BE92EC	BALL	230	50/60	1.5	220	2200	2800	230	68

EC Axial Fan Ø360x100.5mm

Axial Fans

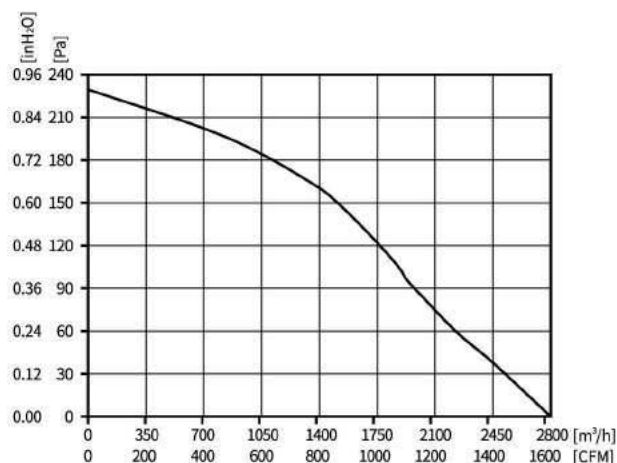


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	4.0KG	E2

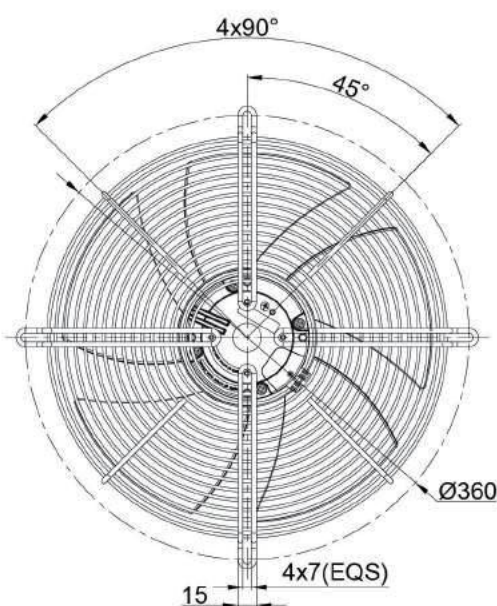
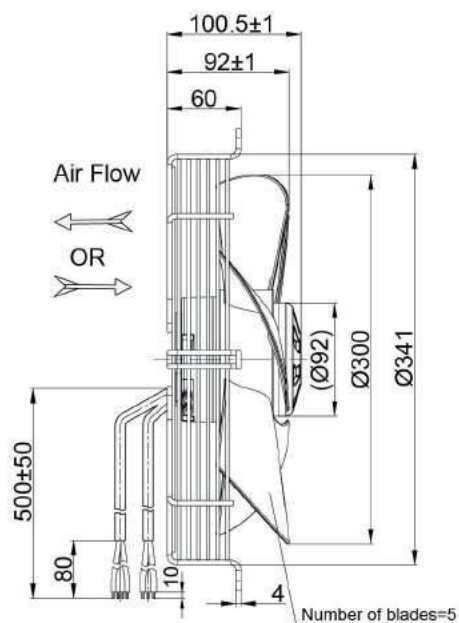


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N300B2E-MZ0	BE92EC	BALL	230	50/60	1.5	220	2200	2800	230	68

EC Axial Fan Ø350x177mm

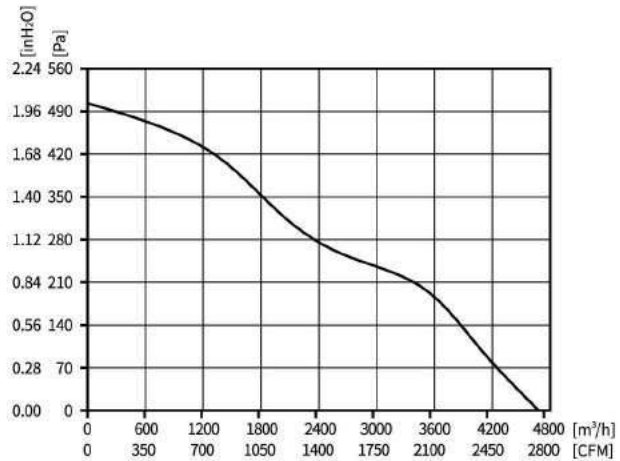


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class F	Operating Temperature -25°C~+60°C	Weight 6.1KG	Wiring Mode E3
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

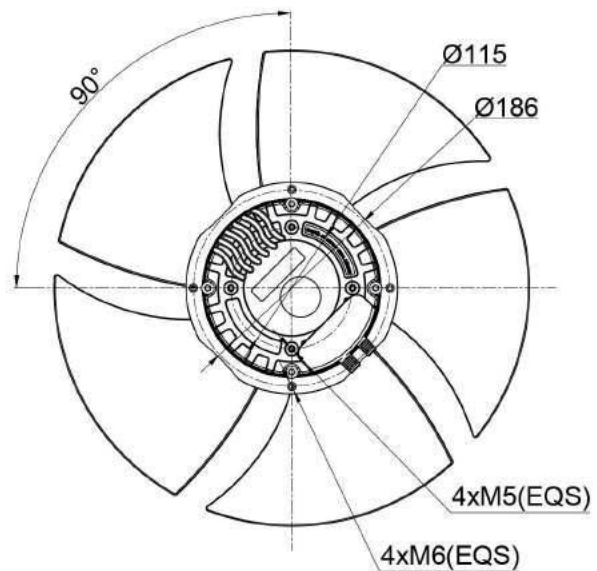
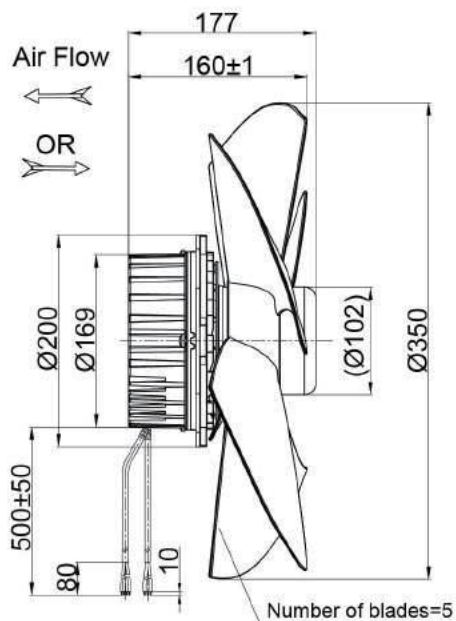


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N350B2E-ZN5	BE102EC	BALL	230	50/60	3.1	700	2500	4700	500	69

EC Axial Fan Ø422x175.5mm

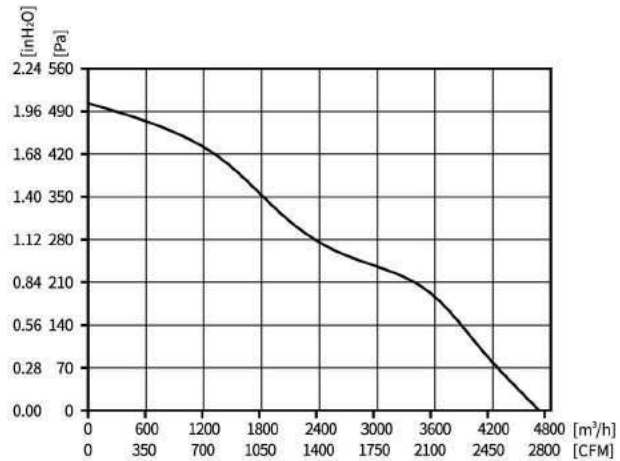


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	F	-25°C ~ +60°C	8.0KG	E3

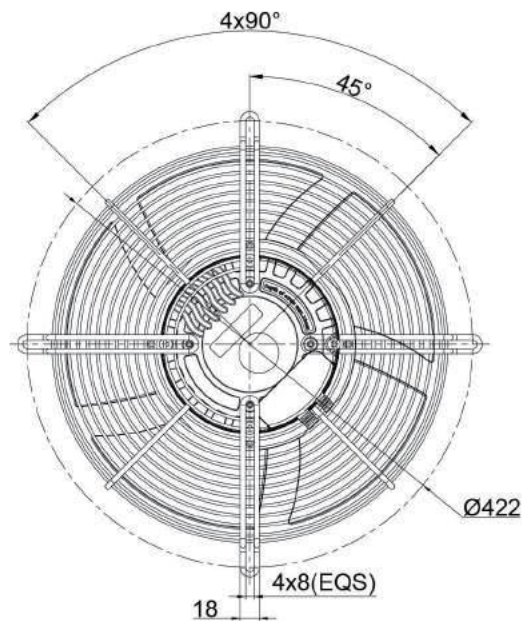
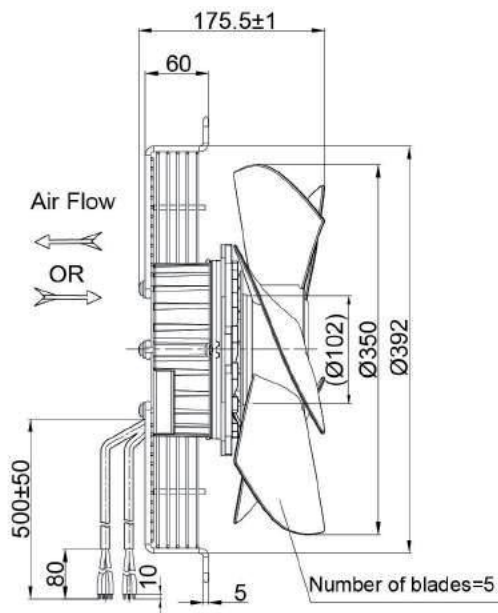


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N350B2E-ZW5	BE102EC	BALL	230	50/60	3.1	700	2500	4700	500	69

EC Axial Fan Ø350x109mm

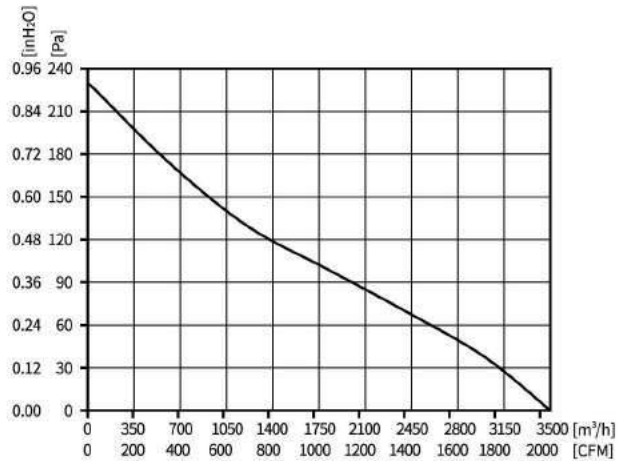


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C~+60°C	Weight 3.65KG	Wiring Mode E2
---	------------------------------	-------------------------	-----------------------	--------------------------------------	------------------	-------------------

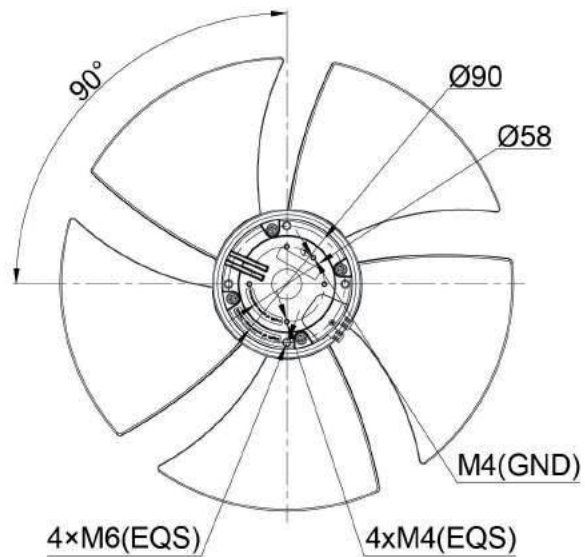
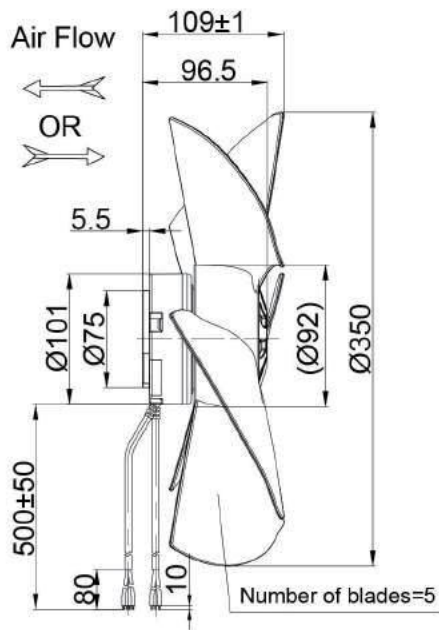


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N350B2E-MN0	BE92EC	BALL	230	50/60	1.5	200	1580	3500	230	67

EC Axial Fan Ø422x116.5mm

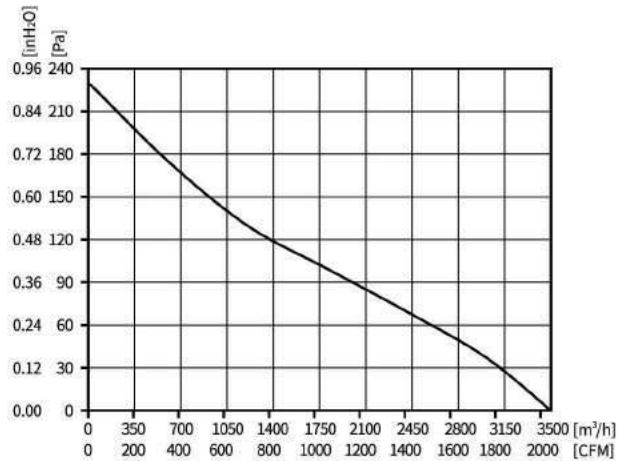


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	5.5KG	E2

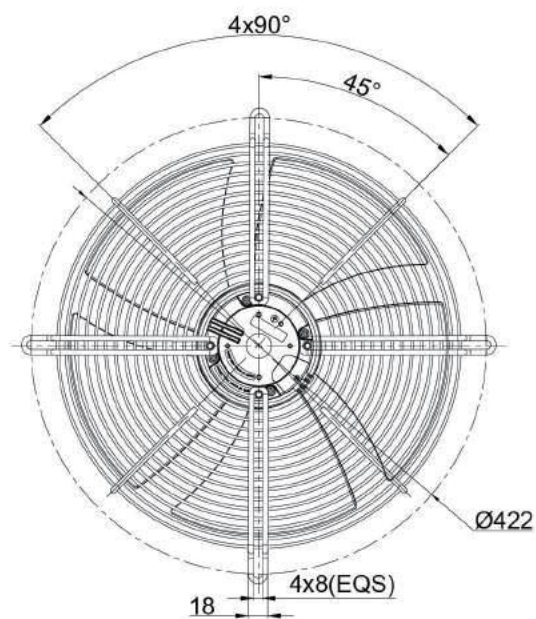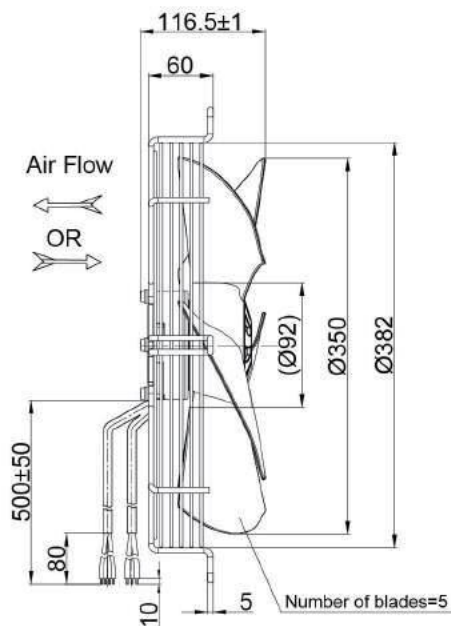



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N350B2E-MZ0	BE92EC	BALL	230	50/60	1.5	200	1580	3500	230	67

EC Axial Fan Ø400x177mm

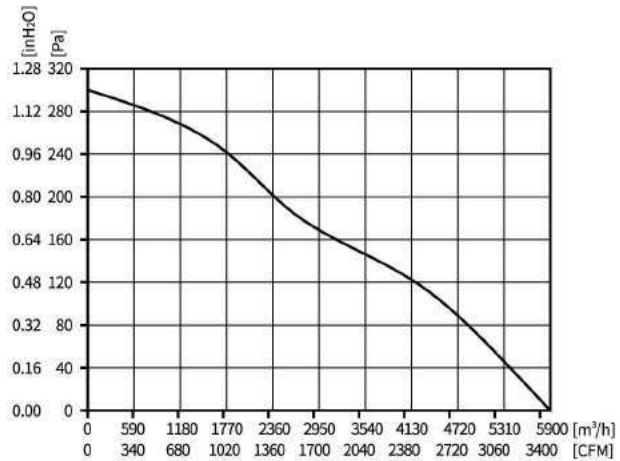

Axial Fans


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class F	Operating Temperature -25°C~+60°C	Weight 6.4KG	Wiring Mode E3
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

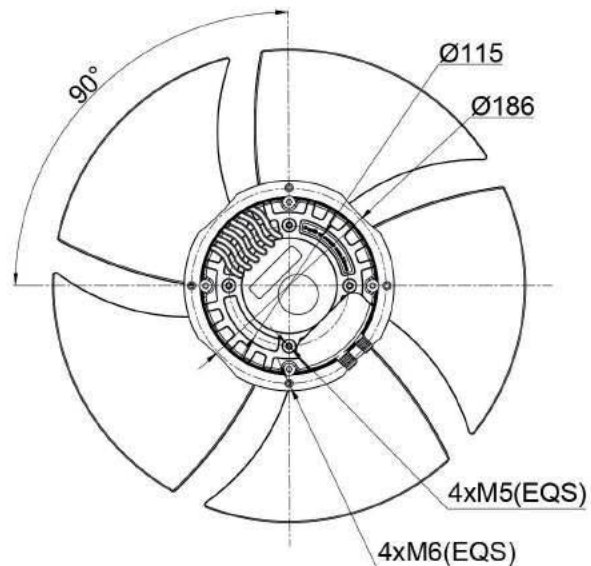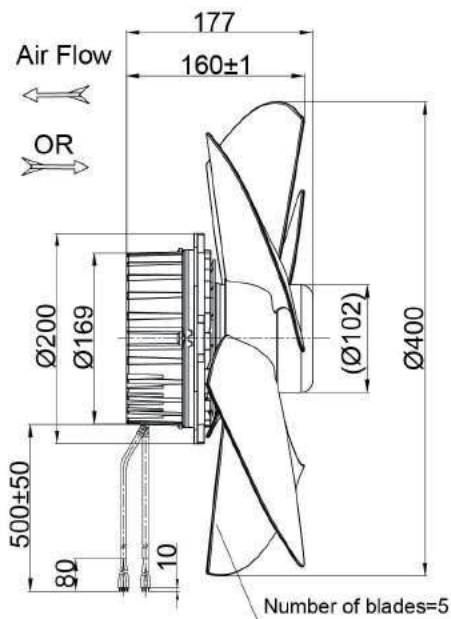



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N400B2E-ZN5	BE102EC	BALL	230	50/60	3.1	700	1800	5900	300	73

EC Axial Fan Ø522x181.5mm

Axial Fans

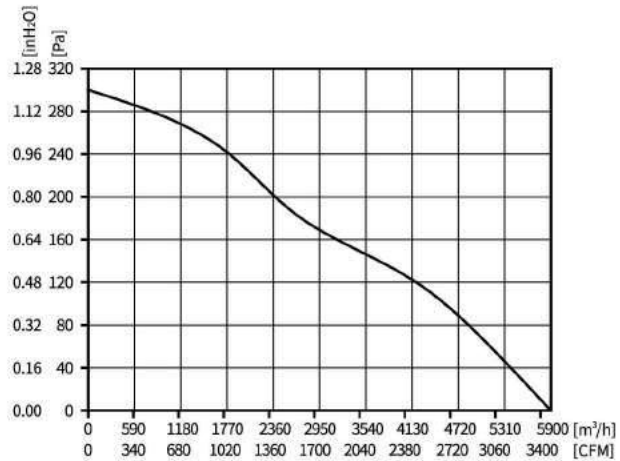


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	F	-25°C ~ +60°C	8.5KG	E3

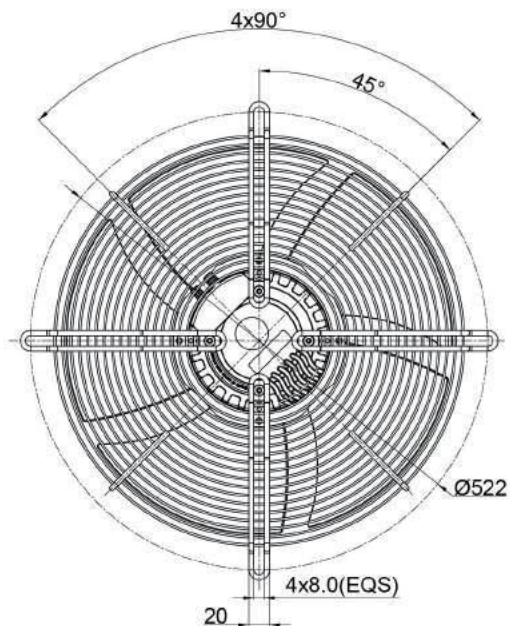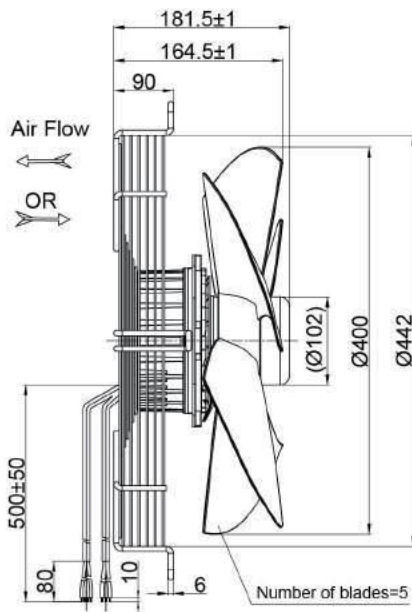



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N400B2E-ZW5	BE102EC	BALL	230	50/60	3.1	700	1800	5900	300	73

EC Axial Fan Ø400x95mm

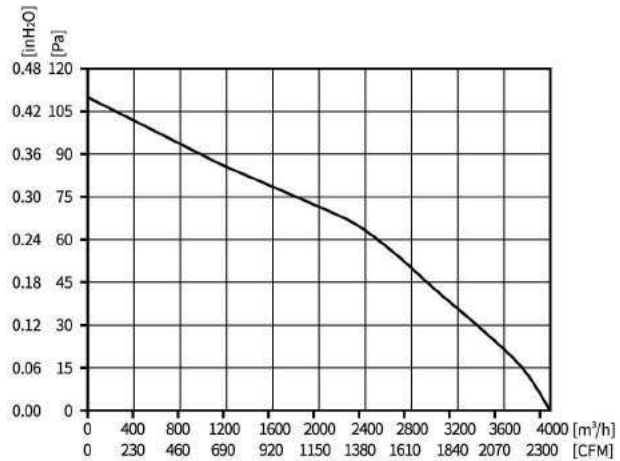

Axial Fans


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class B	Operating Temperature -25°C~+60°C	Weight 3.9KG	Wiring Mode E2
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

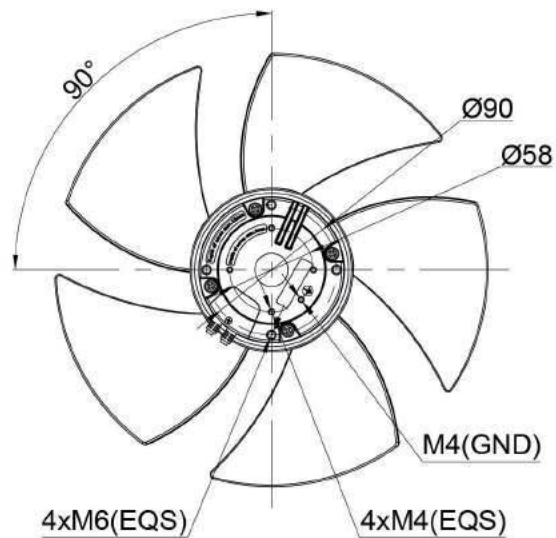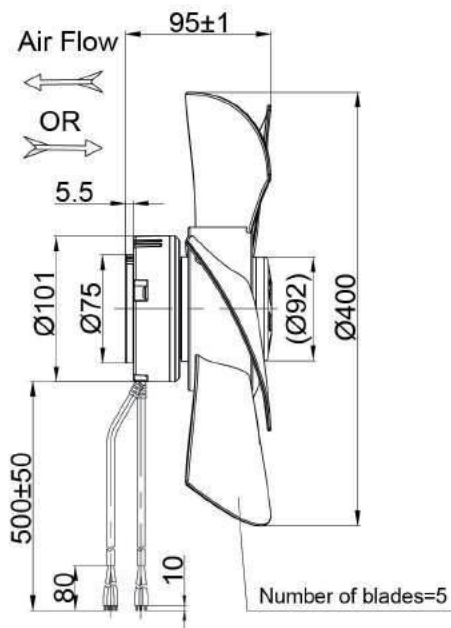



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N400B2E-MN0	BE92EC	BALL	230	50/60	1.25	170	1200	4000	110	68

EC Axial Fan Ø470x101.5mm

Axial Fans

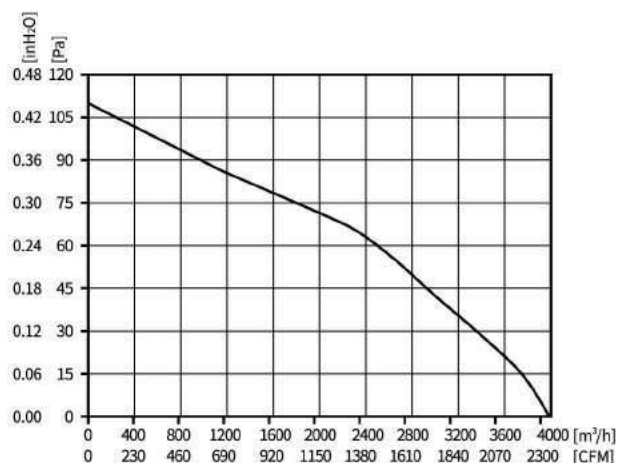


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	B	-25°C ~ +60°C	6.5KG	E2

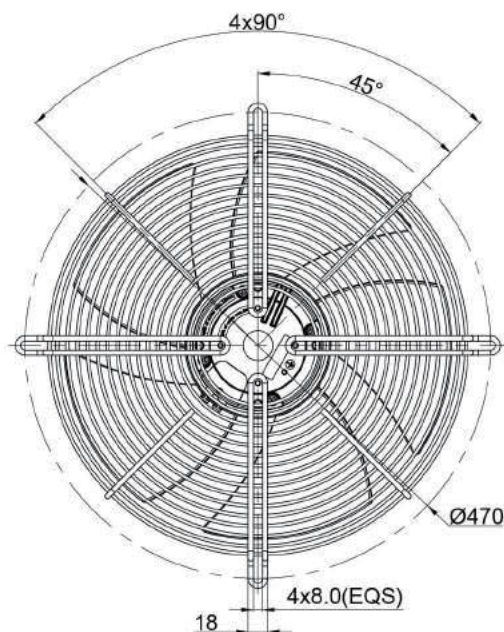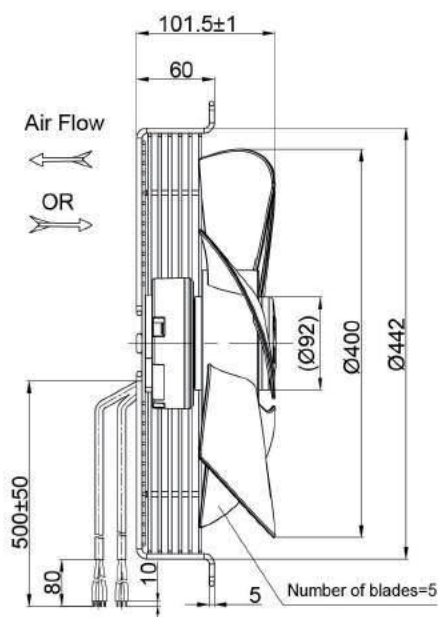



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N400B2E-MZ0	BE92EC	BALL	230	50/60	1.25	170	1200	4000	110	68

EC Axial Fan Ø450x177mm

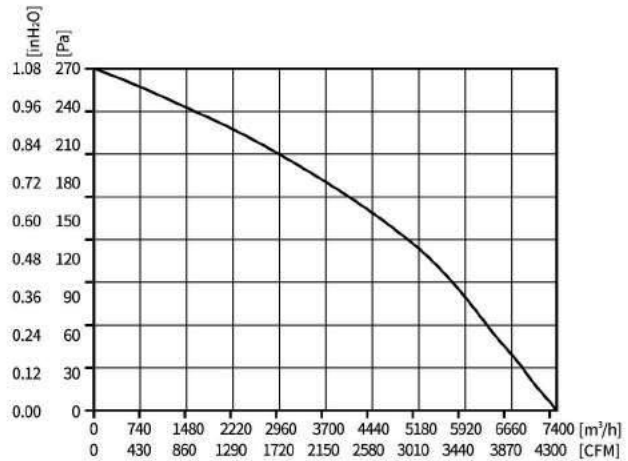


Axial Fans

Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class F	Operating Temperature -25°C~+60°C	Weight 6.5KG	Wiring Mode E3
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

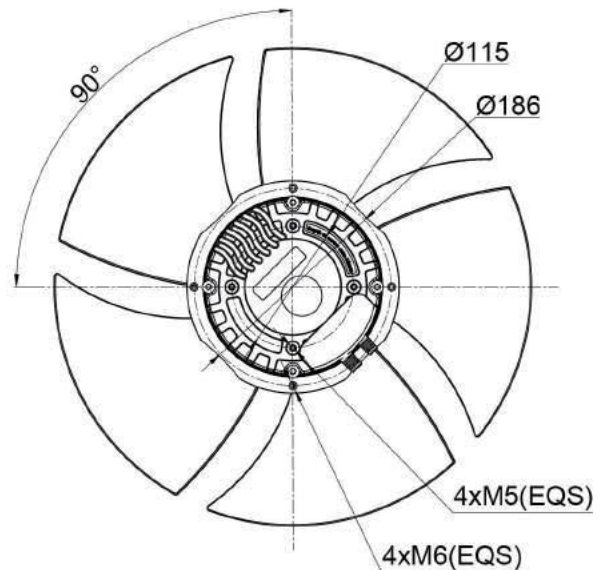
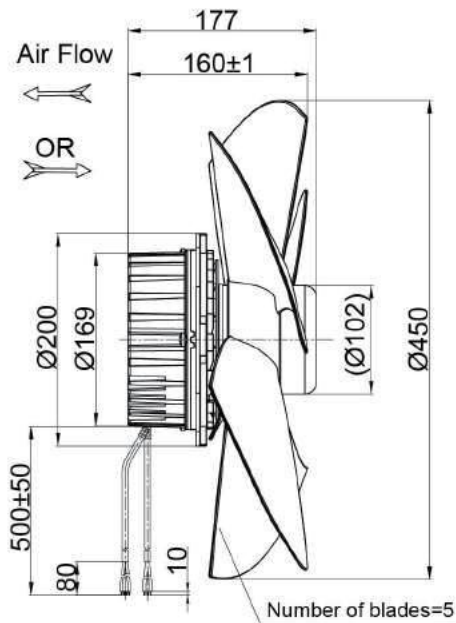


Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N450B2E-ZN5	BE102EC	BALL	230	50/60	1.7	380	1400	7400	270	75

EC Axial Fan Ø522x186mm

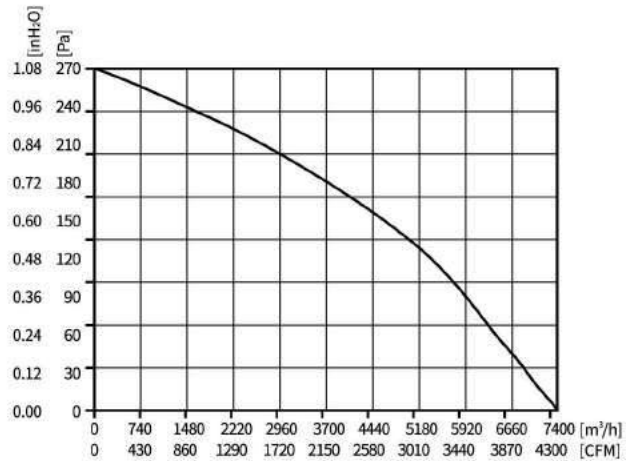


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	F	-25°C ~ +60°C	8.0KG	E3

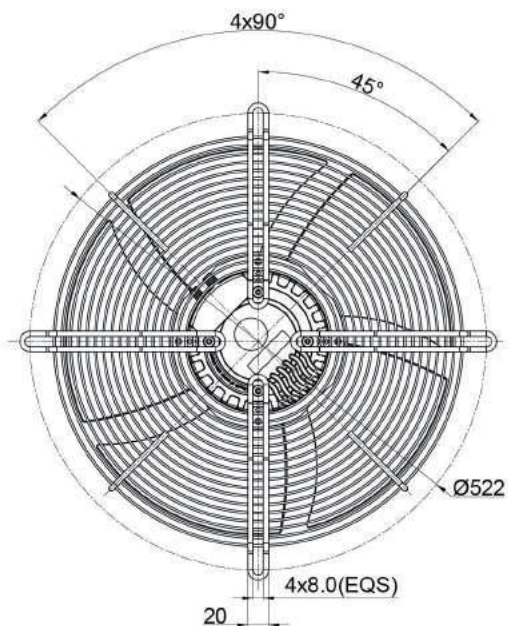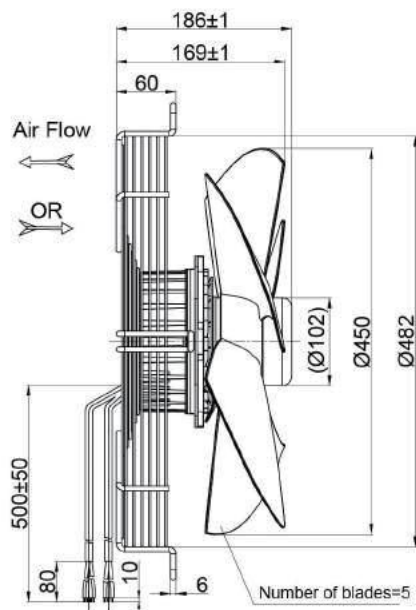



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N450B2E-ZW5	BE102EC	BALL	230	50/60	1.7	380	1400	7400	270	75

EC Axial Fan Ø500x177mm

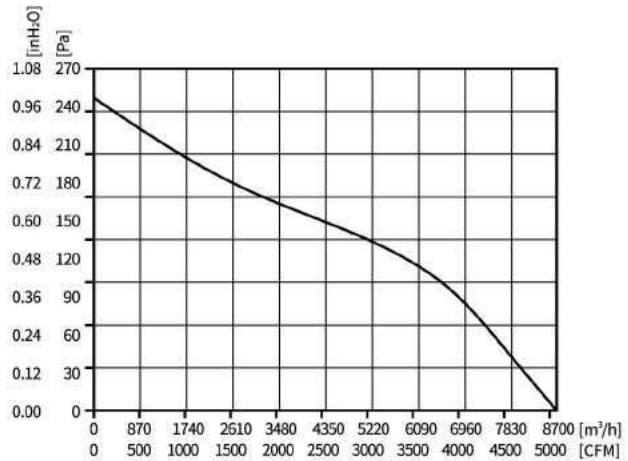

Axial Fans


Motor Type EC BRUSHLESS EXTERNAL ROTOR MOTOR	Speed Control 0-10VDC/PWM	Protection Type IP55	Insulation Class F	Operating Temperature -25°C~+60°C	Weight 6.9KG	Wiring Mode E3
---	------------------------------	-------------------------	-----------------------	--------------------------------------	-----------------	-------------------

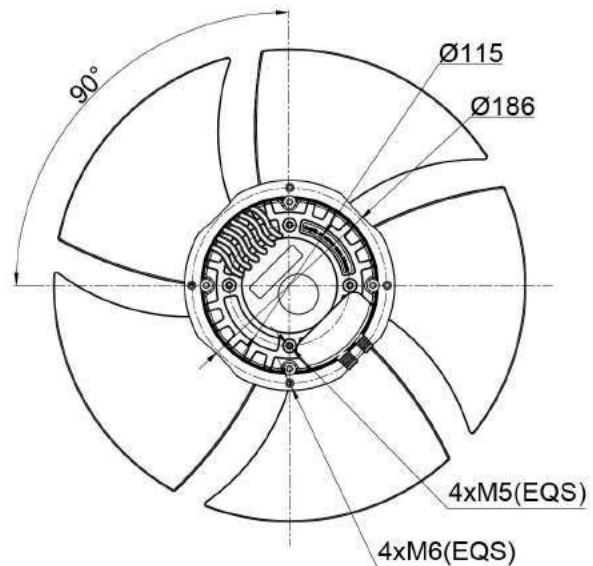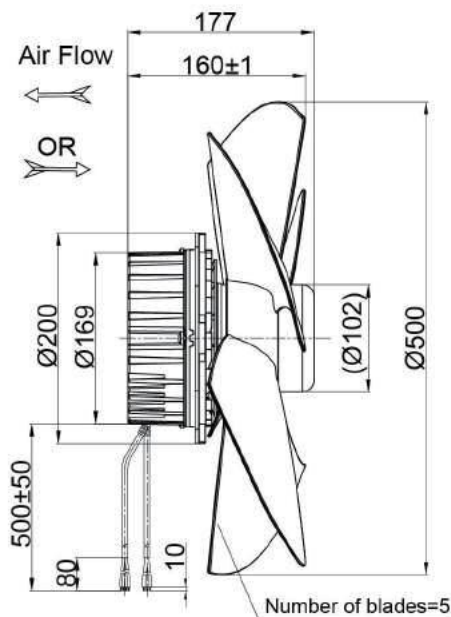



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N500B2E-ZN5	BE102EC	BALL	230	50/60	3.1	700	1550	8700	250	71

EC Axial Fan Ø570x186mm

Axial Fans

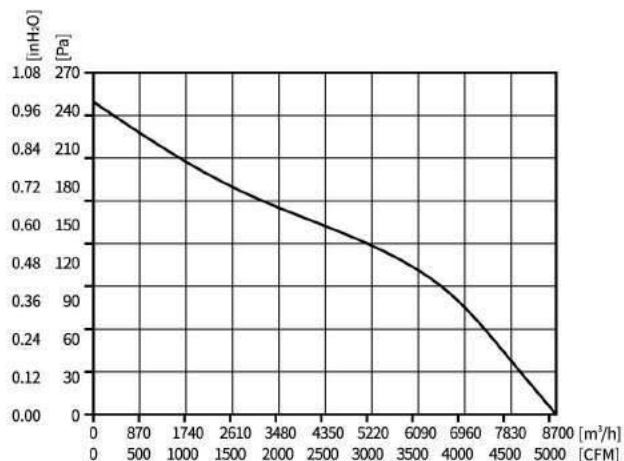


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
EC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VDC/PWM	IP55	F	-25°C ~ +60°C	8.1KG	E3

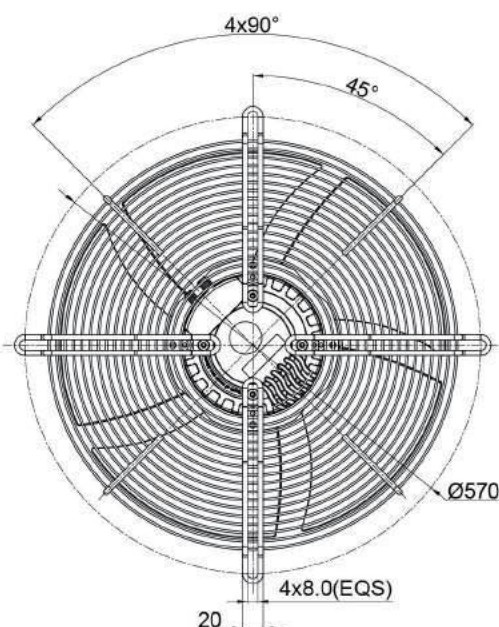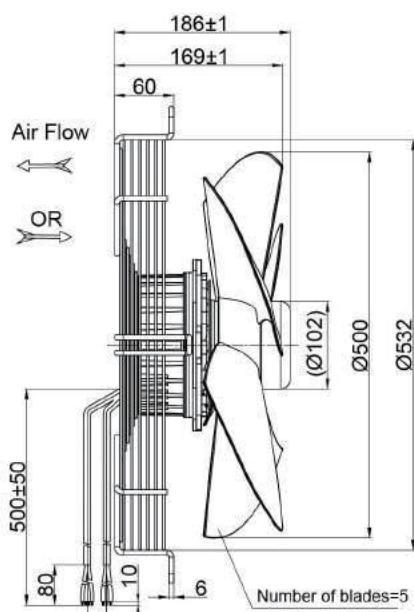



Model	Motor	Bearing System	Rated Voltage	Frequency	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VAC	Hz	A	W	RPM	M³/H	Pa	dB(A)
PG3N500B2E-ZW5	BE102EC	BALL	230	50/60	3.1	700	1550	8700	250	71

DC Axial Fan Ø200x72.4mm

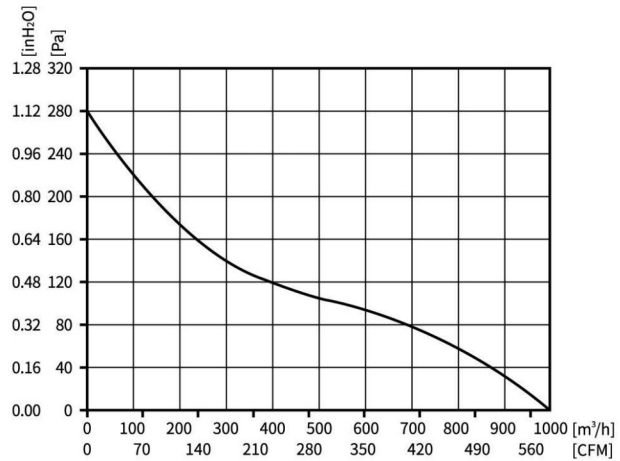

Axial Fans


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
DC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VVDC/PWM	IP55	B	-25°C~+60°C	1.2KG	D1

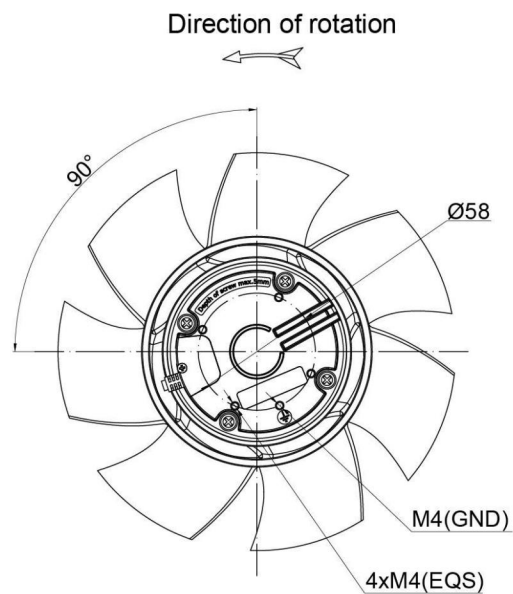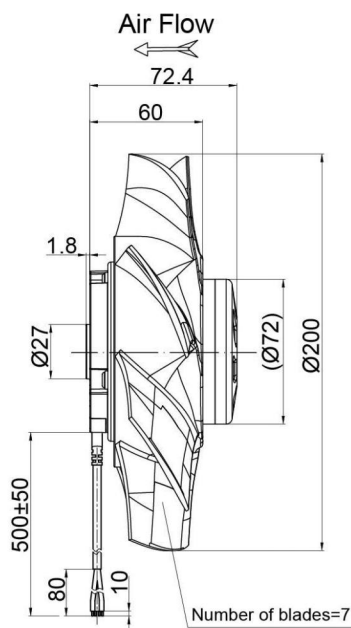



Model	Motor	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VDC	VDC	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B24-RN0	BE72DC	BALL	24	16~28	2.2	52.8	3000	1000	280	62
PA3N200B48-RN0	BE72DC	BALL	48	36~57	1.1	52.8	3000	1000	280	62

DC Axial Fan Ø200x80mm

Axial Fans

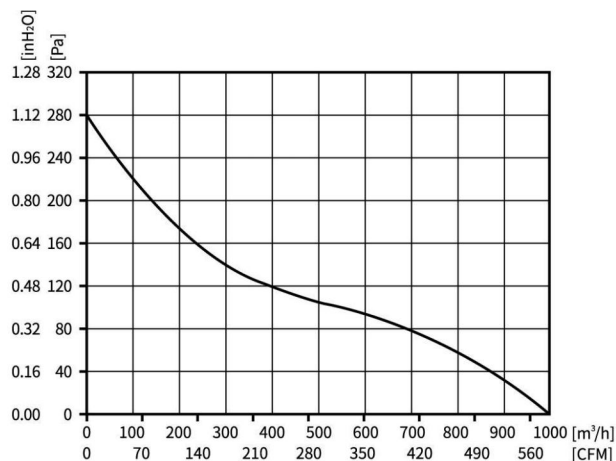


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
DC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VVDC/PWM	IP55	B	-25°C ~ +60°C	1.86KG	D1

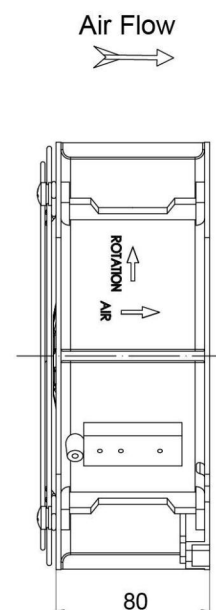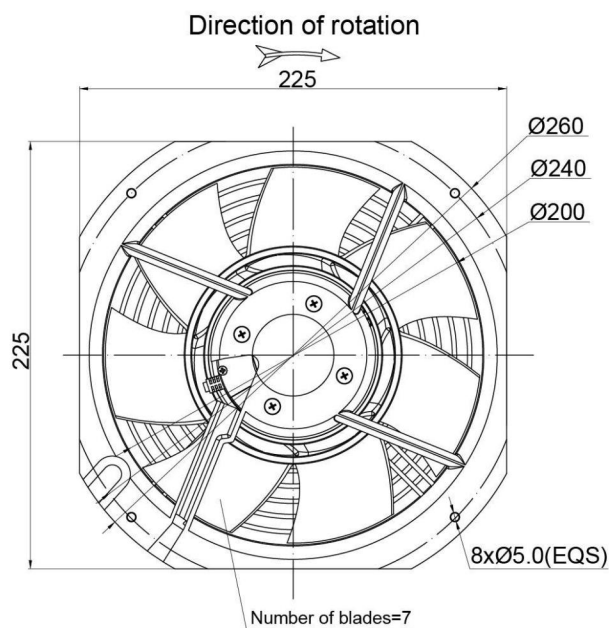



Model	Motor	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VDC	VDC	A	W	RPM	M³/H	Pa	dB(A)
PA3N200B24-RZ0	BE72DC	BALL	24	16~28	2.2	52.8	3000	1000	280	62
PA3N200B48-RZ0	BE72DC	BALL	48	36~57	1.1	52.8	3000	1000	280	62

DC Axial Fan Ø250x72.4mm

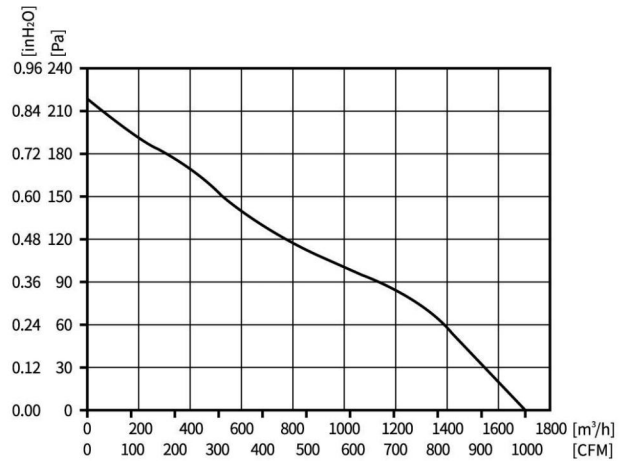

Axial Fans


Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
DC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VVDC/PWM	IP55	B	-25°C~+60°C	1.4KG	D1

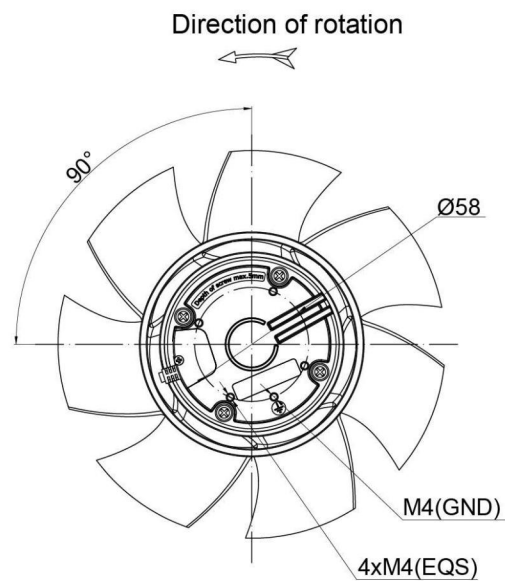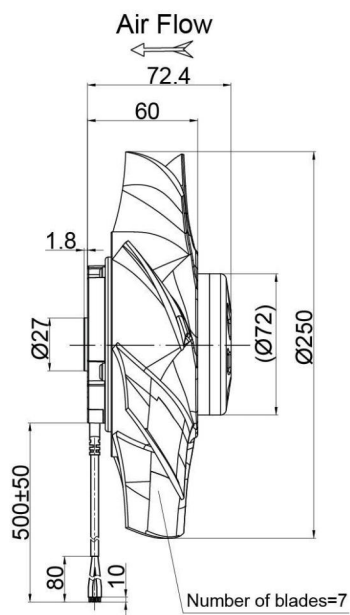



Model	Motor	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VDC	VDC	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B24-RN0	BE72DC	BALL	24	16~28	2.8	67.2	2500	1700	220	64
PA3N250B48-RN0	BE72DC	BALL	48	36~57	1.4	67.2	2500	1700	220	64

DC Axial Fan Ø250x80mm

Axial Fans

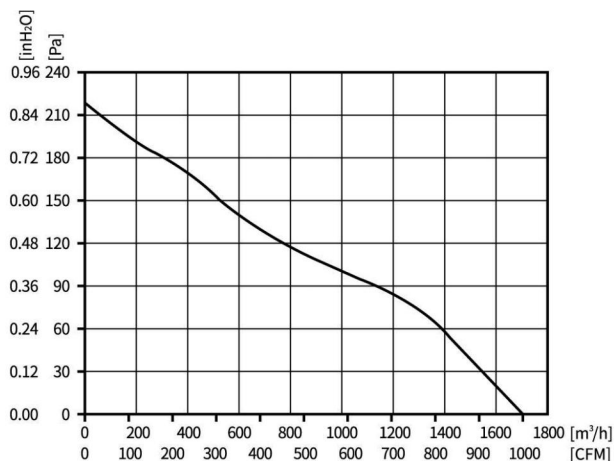

Motor Type	Speed Control	Protection Type	Insulation Class	Operating Temperature	Weight	Wiring Mode
DC BRUSHLESS EXTERNAL ROTOR MOTOR	0-10VVDC/PWM	IP55	B	-25°C ~ +60°C	2.2KG	D1

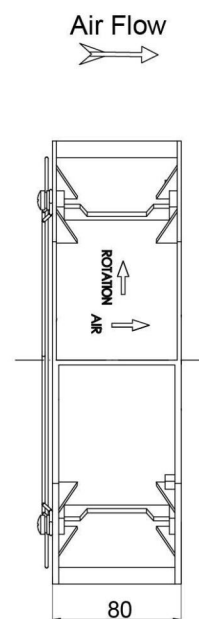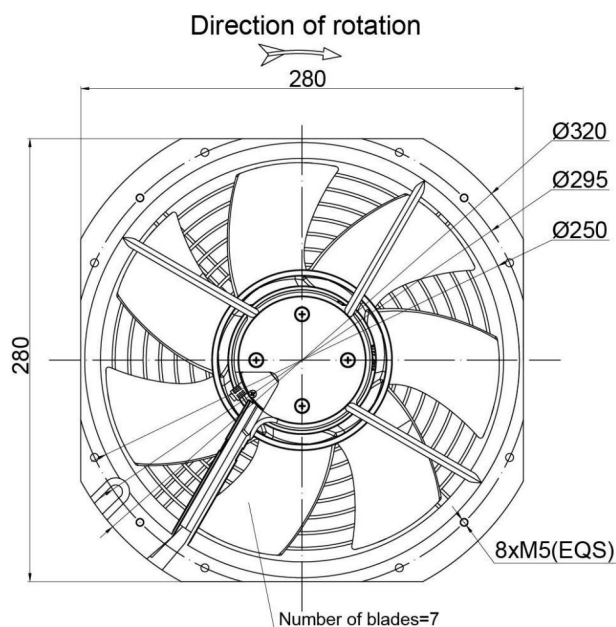

Model	Motor	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow	Air Pressure	Sound Level
Part No.	Type	B/S	VDC	VDC	A	W	RPM	M³/H	Pa	dB(A)
PA3N250B24-RZ0	BE72DC	BALL	24	16~28	2.8	67.2	2500	1700	220	64
PA3N250B48-RZ0	BE72DC	BALL	48	36~57	1.4	67.2	2500	1700	220	64



PBM Motor and Fan (Suzhou) Co., Ltd

No.69 Weixin Road,Suzhou Industrial Park,Suzhou,City,Jiangsu Province,P.R.China

Tel: +86 512 6858 1674

Fax: +86 512 6858 1574

Sales Department: sales@pbmmf.com

After Sales Department: daniel@pbmmf.com